



MAIN DRAINS AND RETURN FITTINGS


For Gunite and Vinyl Liner Pools

Main Drain Features

- **Extra deep sump body** allows plumbing connection below concrete, eliminating need for 45 degree fittings.
- **Sump body has multiple strengthening ribs** for durability.
- **“No Leak Flange”** on sump body for a positive seal to concrete or vinyl.
- **Available 1-1/2" or 2" threaded port connections.**
- **Anti-vortex cover rated at 88 gpm.**
- **Test plug with nylon “non-extruding” washer** included with each main drain.
- **Stainless steel screws** secure cover and liner seal ring for long life.



Anti-Vortex Cover
NSF listed to
ANSI/ASME A112.19.8

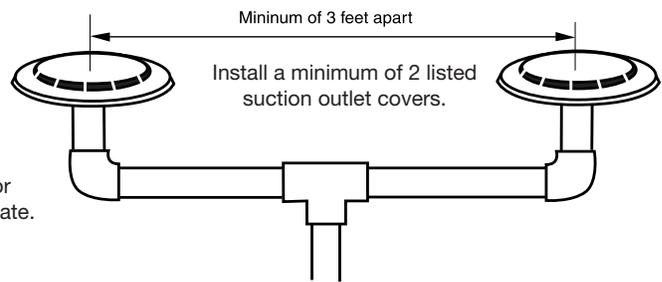

Each main drain shall be rated at or above the maximum system flow rate.

Recommended installation of main drains to protect against entrapment hazards. Always consult current applicable standards as requirements and recommendations may change.

Return Fittings Features

- **Insider models** for concrete available in 1-1/2" or 2" slip.
- **Interchangeable orifices** included with each eye-ball fitting ensures you have the right size from 1/2" to 1" and 90 degree diverter.



Concrete 1-1/2"



Return Fittings
Concrete 2"



Vinyl Liner

Main Drains

Ordering Information

Model No.	Order No.	Description	Wt.
MD-G15-AV	9412-0078	Concrete main drain, white, 1-1/2" anti vortex.	2
MD-G2-AV	9412-0052	Concrete main drain, white, 2" anti vortex.	2
MD-L15-AV	9412-0037	Vinyl liner main drain, white, 1-1/2" anti vortex.	2
MD-L2-AV	9412-0011	Vinyl liner main drain, white, 2" anti vortex.	2
RF-G15	9412-0110	Concrete return fitting, white, 1-1/2".	
RF-G2	9412-0128	Concrete return fitting, white, 2".	
RF-L15	9412-0094	Vinyl liner return fitting, white.	
RF-TP	23-4872-00-R	Return fitting test plug.	

Note: For parts, see page 119.